

GIUNTI A 2 VIE PER ALTE PRESSIONI E BASSE VELOCITA' DUAL FLOW UNIONS FOR HIGH PRESSURE AND LOW SPEED

SERIE HD

IMPIEGO: ARIA • OLIO IDRAULICO


USE: AIR • HYDRAULIC OIL

Limiti operativi

PRESS. MAX OLIO	250 Bar
PRESS. MAX ARIA	10,5 Bar
TEMPERATURA MAX	120 °C

Operating limits

MAX OIL PRESS	3500 PSI
MAX AIR PRESS.	153 PSI
MAX TEMPERATURE	250 °F

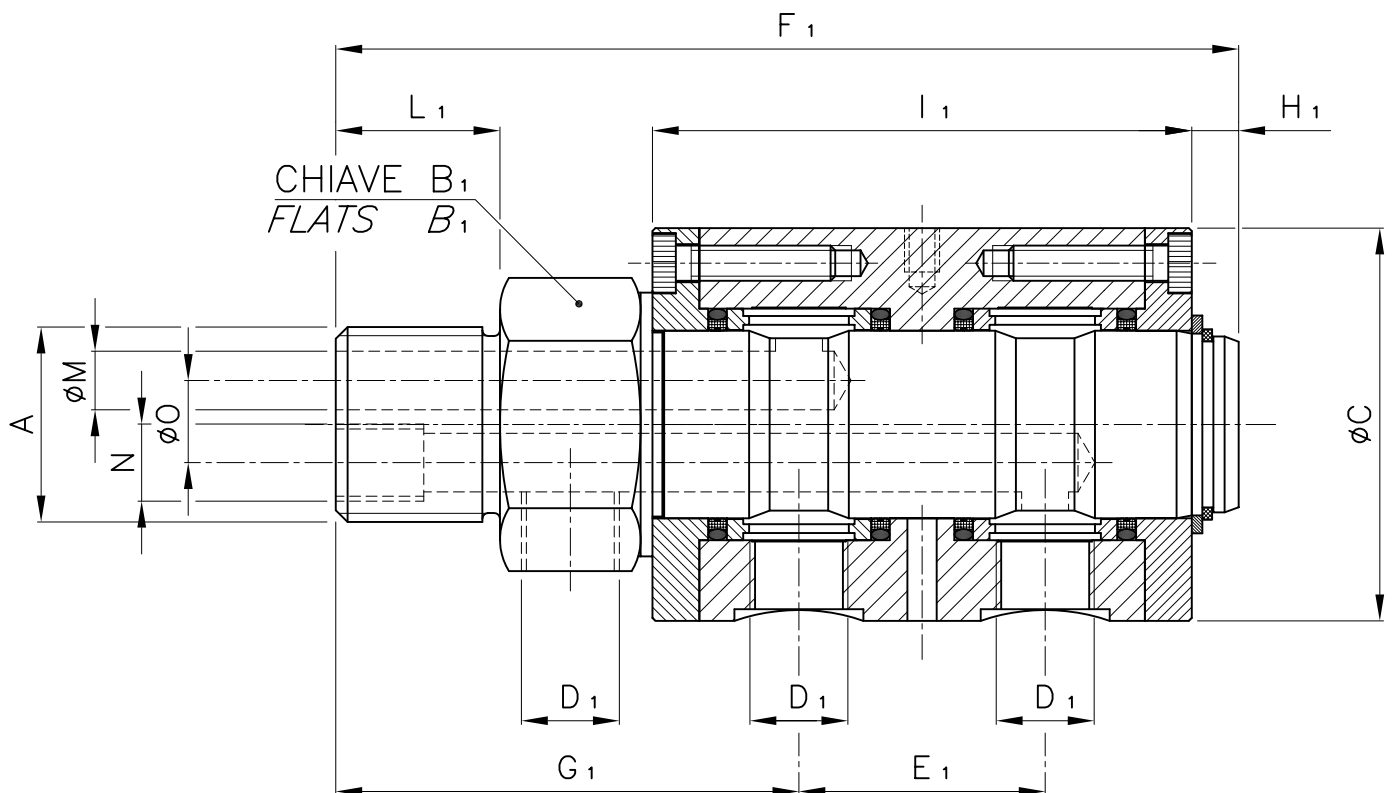

Grandezza Size	A ₁	B ₁	C ₁	D ₁	E ₁	F ₁	G ₁	H ₁	I ₁	L ₁	M ₁	N ₁	O ₁	V. max [g/min] Max Sp. [RPM]
HD-025	3/4"	41 1.61	64 2.51	1/4"	36 1.41	133,2 5.24	68 2.67	7,2 0.28	80 3.14	24 0.94	8 0.31	1/8"	11 0.43	120
HD-037	1"	55 2.16	67 2.63	3/8"	42 1.65	154 6.06	79 3.11	8 0.31	92 3.62	28 1.10	10 0.39	1/4"	14 0.55	100